



鼎安达玻璃  
DingAnDa Glass

## 天津市鼎安达玻璃有限公司 Tianjin DingAnDa Glass Co.,LTD

天津总公司:天津市北辰区韩家墅工业园C区后道41号  
电话:022-88829505 022-88829506

手机:186 0225 2111

传真:022-88829507

网址:[www.dadglass.com](http://www.dadglass.com)

沙河分公司:河北省沙河市正玻工业园A4-1(高速对面)

广东省分公司:广东省佛山市顺德区伦教常教花园北路2号

业务经理:

手机:



鼎安达玻璃  
DingAnDa Glass

天津市鼎安达玻璃有限公司  
Tianjin DingAnDa Glass Co.,LTD

# The 公司简介 Company

## 辉煌时刻 展望未来

Look to the future for glorious moments

### 第一章：辉煌篇

天津市鼎安达玻璃有限公司，成立于1997年，位于华北物流中心城市天津，经过二十载的发展，逐渐成为国家玻璃行业一颗璀璨的明星，是国内玻璃资源整合最全的企业，玻璃行业的领军企业。

公司立足天津，以中国玻璃产业基地沙河为大型玻璃和玻璃配件耗材仓库辐射全国，以青岛和天津等临海口岸打通海外销售渠道。经过几年高速发展，公司旗下拥有天津市日昇源玻璃技术有限公司、天津市鼎安达物流有限公司、青岛鼎安达玻璃科技有限公司、沙河鼎安达玻璃分公司、沙河鼎安达物流分公司和山西鼎安达玻璃分公司，拥有玻璃贸易、玻璃机械、特种玻璃、玻璃化工、玻璃物流、玻璃耗材和外贸出口等七大板块业务，成为行业顶级企业，犹如玻璃行业一颗灿烂的明星，屹立中国，走向世界！

### 第二章：实力篇

以创新谋发展，以责任树立品牌，铸就了鼎安达玻璃民族企业的价值典范。本着“锲而不舍、精益求精、与时俱进、不断开拓、永攀高峰”的企业精神，不断追求生产规模的壮大、产品结构的合理化以及企业文化体系的完善，促进企业综合实力的提升。

公司董事长 - 张剑先生是玻璃行业优秀的企业家，至今已从事玻璃行业30余年，是中国玻璃资源整合专家。他带领全体员工披荆斩棘，勇往直前，逐渐拓展到了玻璃物流、玻璃机械、玻璃化工、特种玻璃、玻璃耗材配件和外贸出口等业务，逐渐形成了玻璃贸易带动物流运输，物流运输辅佐玻璃贸易，玻璃机械和特种玻璃等七大板块业务共同发展的全新格局！

品牌驱动经营，品质成就荣耀。鼎安达公司每年定期参加中国国际玻璃展，不定期参加新加坡、印度、德国、土耳其等多个海外国家展会，从中学习先进管理经验与产品知识，不断提高公司在国内的知名度。同时，与国内外众多企业结成长期战略合作伙伴关系，销售网络覆盖国内32个省市自治区，并拓展了几百家国外客户，赢得了海内外广大客户的信任与赞赏。

### 第三章：展望篇

鲲鹏展翅，志在高远，雄关漫道，征途不息！进入新的发展时期，鼎安达的宏伟蓝图才刚刚展开，公司将以振兴中华为己任，以建设一流企业，开拓国内外市场为目标，坚持“质量是企业的生命，信誉是企业的发展”为经营理念，恪守“生产用户满意的产品，提供顾客满意的服务”为企业宗旨，在竞争激烈的市场插上飞翔的翅膀，扬帆起航，纵横四海！




产品专利十余种



上海YATO合作伙伴



日本SMC合作伙伴

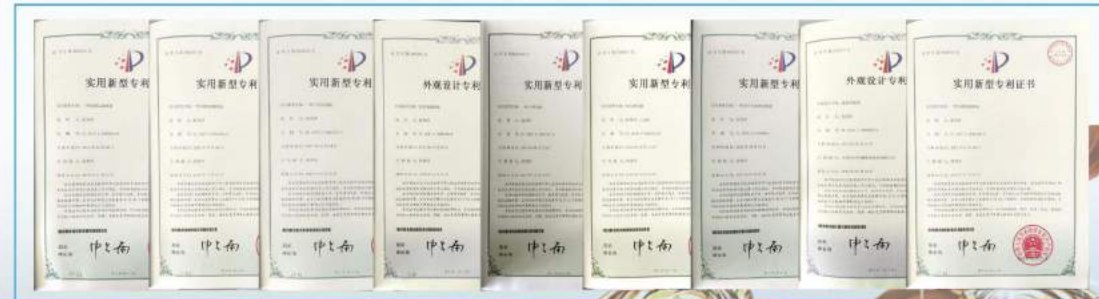

# 目录



畅销国内 远销海外100多个国家

## 天津鼎安达旗下公司

天津鼎安达玻璃有限公司  
 天津市日昇源玻璃技术有限公司  
 恒昇源建筑防火科技廊坊有限公司  
 青岛鼎安达玻璃科技有限公司  
 天津市鼎安达沙河分公司  
 天津通达利玻璃有限公司  
 天津市鼎安达广东伦敦分公司  
 天津市鼎安达山西运营部  
 天津市日昇源石家庄架子工厂

PAGE	夹胶炉设备 EVA Glass Laminating Machine	05-06
	强对流循环风夹胶炉 Strong Convective Circulation Wind Laminated Furnace-----	05
	360°单区单温炉 360° single zone single temperature furnace-----	06
	360°双区双温炉 360° dual zone dual temperature furnace-----	06
PAGE	蒙砂玻璃生产线 Acid Etched Producing Machine	07
PAGE	抛光生产线 Polishing Production Line	08
PAGE	纳米硅防火玻璃生产线 Nano Fireproof Glass Producing Line	09-10
PAGE	烧检炉 Fire Proof Glass Testing Furnace	11
PAGE	吸盘系列 Glass Sucker Series	12-22
	气动吸盘 Pneumatic Vacuum Glass Lifter Sucker-----	12-15
	电动吸盘 Electrical Glass Lifter Sucker-----	16-18
	移动立柱吸盘 Mobile Column Suction Cups-----	19
	电动旋臂起重机 Electric Slewing Crane-----	20
	飞臂吸盘 Flying Arm Suction Cup-----	19
	夹层玻璃生产线合片专用吸盘 Laminated Glass Dedicated Sucker-----	20
	龙门架式真空吸盘 Portal-Frame Shape Vacuum Glass Sucker-----	21
	旋转型立柱式真空吸盘 Column-shape Vacuum Lifter Sucker-----	22
PAGE	磨边机系列 Edge Grinding Machine Series	23-24
	新X-02双磨头磨边机 New X-20 Double Head Edge Grinding Machine-----	23
	RSY-08A多功能磨边机 RSY-08A Multifunctional Edge Grinder-----	23
	X-09磨边机 X-09 Edge Grinding Machine-----	24
	水式砂带机 Water Type Belt Machine-----	24
PAGE	叉车吊臂系列 Forklift Truck Crane Arm Series	25-26
	经典式叉车吊臂 Classic Forklift Truck Crane Arm-----	25
	底座式叉车吊臂 Base Forklift Truck Crane-----	25
	吊杠置顶式叉车吊臂 Hanging Bar Set-top Folklift Truck Crane Arm-----	25

新式叉车吊臂 New-style Forklift Truck Crane Arm-----	26
双臂式叉车吊臂 Double-jib Forklift Crane Jib-----	26
液压叉车 Hydraulic Forklift-----	26
PAGE   U型吊臂 Glass Container Unloading Tool (with crane)	27
PAGE   叉车串杆 Container U-Shape Suspension Arm	28
PAGE   玻璃上片台C款 Glass-loading Table C Type	29
PAGE   玻璃专用吊带系列 Glass Sling Series	30
PAGE   吊杠系列 Hanging Bar Series	31
PAGE   玻璃吊夹系列 Glass Supporting Clamp Series	32
意大利LC吊夹 LC Glass Clamp-----	32
全自动鳄鱼吊夹 Full-automatic Glass supporting clamp-----	32
PAGE   除膜机系列 Film-Removing Machine Series	33-34
气浮式除膜机 Air Floating Film-Removing Machine-----	33
双磨头除膜机 Double Head Film-Removing Machine-----	33
万向轮式除膜机 Universal Wheel Film Removing Machine-----	34
双手持Low-E除膜机 Offline Low-E Glass Film-removing Machine-----	34
单手持Low-E除膜机 One-hand Operation Low-E Coating Removing Machine-----	34
PAGE   玻璃放置架系列 Class Storck Rack Series	35-39
L架 L Shape Shelf-----	35
L架速压杆 L Rack Fixed Bar-----	36
L架刀片杆 L Frame Layered Rewinding Rod-----	36
玻璃精品架 High Quality Glass Shelf-----	36
AL型玻璃原片放置架 AL-Type Sheet Glass Stock Shelf-----	37
A字架 A Shape Shelf-----	37
移动仓储架 Removable Storage Glass Shelf Specification-----	38
特殊定制玻璃放置架 Customized Glass Rack-----	39
PAGE   工具箱系列 Mechanical Maintenance Tool Car	40
PAGE   风冷清胶工具 Cold and windy glue tool	41

## 天津市日昇源玻璃技术有限公司 Tianjin Rishengyuan Glass Technology Co.,Ltd

天津市日昇源玻璃技术有限公司成立于2013年,地处美丽的海滨城市天津,是一家专业从事玻璃机械和特种玻璃产品研发、生产和销售的高新技术企业,公司资金雄厚,生产设备先进,实力过硬,并拥有一支专业过硬经验丰富的研发和生产队伍。公司分为玻璃机械部和特种玻璃工程部,经过两三年的迅速发展,公司已成为国内玻璃机械和特种行业领军企业,产品远销海内外五千多家客户,得到广大客户的赞誉与肯定!

玻璃机械产品以中小型玻璃机械为主,种类齐全,选材精细,品质过硬。产品有夹层玻璃设备、烧检炉、纳米硅防火玻璃生产线、全自动蒙砂玻璃生产线、抛光线、双磨头磨边机、集装箱U型吊臂、除膜机、叉车串杆、真空吸盘吊具、玻璃上片台等相关产品远销国内外,得到广大客户的赞誉和肯定。

“专业决定品质、实力铸就品牌、诚信创造永远”,日昇源愿与您携手共创辉煌!

Tianjin RiShengYuan Glass Technology Co., Ltd established specialized in research, development and selling of Glass Machinery and Special Glass products. Equipped with strong technical team, advanced production devices and impeccable management system, the company is dedicated to taking the lead of Glass Machinery and Special Glass industry. The company including Glass Machinery department and Special Glass department, with 3 years fast development, our company has been one of the leaders professional Glass Machinery and Special Glass manufacturers in China.

Glass machinery products to small and medium-sized glass machinery - based, complete variety, fine material selection, quality. The products include laminated glass equipment, fire inspection furnace, nano silicon fireproof glass production line, automatic frosting glass production line, polishing line, double grinding head edging machine, container U-type boom, film removal machine, forklift string rod, vacuum suction cup spreader, glass upper plate and other related products are sold well at home and abroad, and have been praised and affirmed by the customers.

RiShengYuan is willing to work with you hand in hand to create a brilliant future!

## 强对流循环风夹胶炉 Strong Convective Circulation Wind Laminated Furnace



### 基本信息/Basic Information

设备特点：采用循环风加热方式，温度均衡，从而提高产品品质。PLC变频控制系统，温控精准，预设多段温控，根据不同工艺可任意选择温度段数，分段控制，防止溢胶。产量大，耗能低，占地面积小，是加工客户的理想选择。

Equipment features: Adopt the circulating air heating mode, the temperature is balanced, so as to improve the product quality. PLC frequency conversion control system, accurate temperature control, preset multi-stage temperature control, according to different processes can be arbitrary selection of temperature segment, control segment, prevent glue overflow. Large output, low energy consumption, small footprint, is an ideal choice for processing customers.


设备可生产：普通浮法夹胶玻璃、钢化夹胶玻璃、弧形夹胶玻璃、彩色夹胶玻璃、LED玻璃、调光玻璃、防弹玻璃、多层夹胶玻璃、夹丝玻璃、移门强化写真玻璃、晶钢门玻璃、家电面板玻璃、玻璃护角、影楼水晶写真玻璃、背景墙及影视墙玻璃、茶几面玻璃、隔断屏风、无框画等个性化写真玻璃。

Equipment can be produced: ordinary float laminated glass, tempered laminated glass, curved laminated glass, colored laminated glass, LED glass, dimming glass, bulletproof glass, multi-layer laminated glass, wired glass, sliding door reinforcement Photo glass, crystal steel door glass, home appliance panel glass, glass corner, photo studio crystal photo glass, background wall and video wall glass, coffee table glass, partition screen, frameless painting and other personalized photo glass etc.

### 技术参数/Technical Parameters

名称 Name	单层单工位 Single layer and single station	双层单工位 Double layer single station	三层单工位 Three-layer single station	四层单工位 Four-layer single station
电源 Power supply	三相交流380V Three the exchange 380v	三相交流380V Three the exchange 380v	三相交流380V Three the exchange 380v	三相交流380V Three the exchange 380v
总功率 Total power	21.3KW	46.7KW	49.7KW	55.7KW
设备外形 Equipment appearance	3000mmx2450mm x1200	4200mmx3230mm x1500mm	4200mmx3450mm x1700mm	4200mmx3080mm x2320mm
整机重量 The weight of the whole machine	980KG	2400KG	3050KG	3300KG
真空床套数 Vacuum bed sets	一套	二套	三套	四套
最大加工玻璃尺寸 Maximum glass processing size	1900mmx2500mm	2440mmx3660mm	2440mmx3660mm	2440mmx3660mm

备注：设备型号可根据客户要求制作 (Note: the device profile can be produced according to customer requirements)

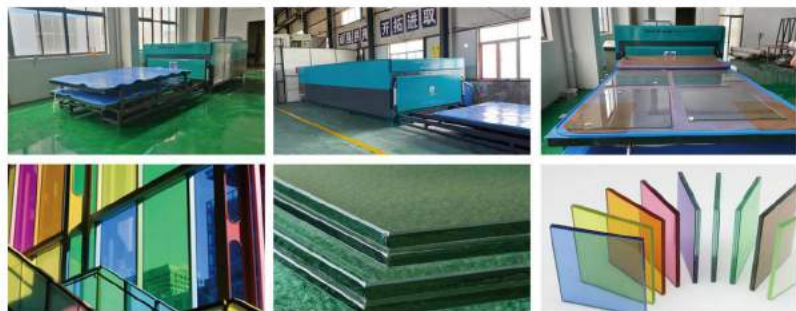

## 夹胶炉 Laminating Furnace



360°单区单温炉/360° single zone single temperature furnace

### 基本信息/Basic Information

360°循环风，炉内循环无死角，温度均匀。有换气系统，达到加热时的温度均衡，在加工完成无人看守时，可打开换气系统，进行冷却，增加产品亮度。

360°circulating air keeps the air float within the furnace, with even temperature. There is a ventilation system to achieve the temperature balance during heating. When the processing complete unattended, the ventilation system can be opened to cool down the internal temperature and increase the brightness of the product.



360°双区双温炉/360° double zone double temperature furnace


### 基本信息/Basic Information

双区双温设计，可以同炉加工不同规格、不同参数的玻璃，360°循环风，如双区四层单工位，有液压平台，节约场地。有换气装置，后期如增加产量，可加装双套系统。


The dual-zone dual-temperature design can process glass of different specifications and different parameters in the same furnace with 360°circulating air. For dual-zone four-layer single station furnace, it comes with hydraulic platform can save space. There is a ventilation device. If the production increases in the future, a double system can be installed.

### 技术参数/Technical Parameters

名称	360°单区单温炉	360°双区双温炉	Name	360° single zone single temperature furnace	360° double zone double temperature furnace
型号	2440x3660		Model	2440x3660	
长度	9.5m	9.5m	Length	9.5m	9.5m
宽度	3.2m	3.3m	Width	3.2m	3.3m
高度	1.8m	2.9m	Height	1.8m	2.9m
功率	42KW	60KW	Power	42KW	60KW

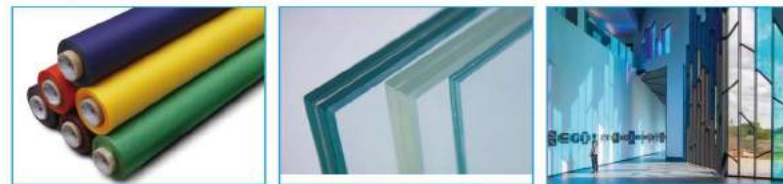

## 蒙砂玻璃生产线 Acid Etched Producing Machine

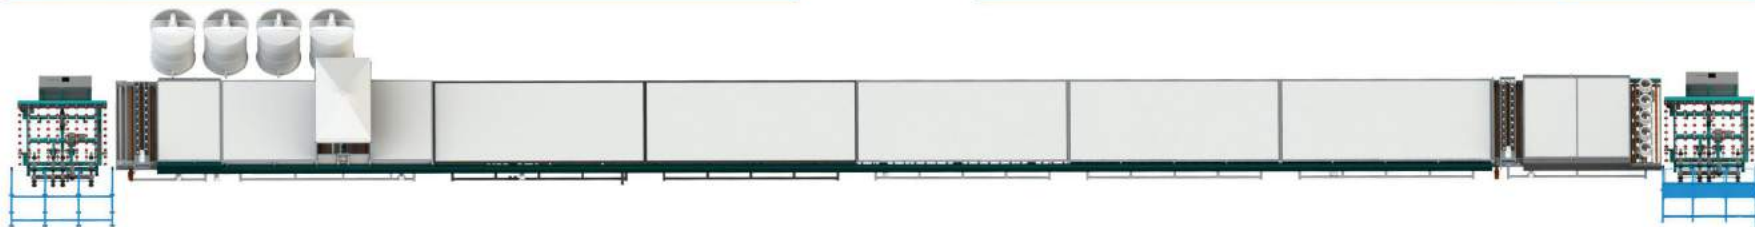

### 基本信息/Basic Information

1. 卧式平线生产, 品质及产量远高于竖池生产, 整版颗粒度可控, 光泽度比较均匀, 不用胶带封边, 且没有亮边, 提高成品的利用率。
2. 全线不用贴膜, 3-4人即可生产, 减少原材料成本。正常生产可以达到30-40秒/片的成品下片。
3. 生产线采用全封闭式, 有利于废气的收集与排放。一次成型, 不用倒玻璃再次清洗, 药液及水可以循环使用, 用水量极少。
4. 采用合理有效的防霉粉滚涂, 减少夹纸的材料。
5. 公司提供技术支持, 可自行调配所需药液, 减少原料购买成本。根据客户需要可做普通玉砂、无手印玉砂、细蒙砂、细油砂、粗油砂。
6. 本生产线采用自动上下片, 产量大幅增加, 减少人工成本, 降低人工操作风险。

### 技术参数/Technical Parameters

名称	蒙砂玻璃生产线	Name	Acid Etched Producing Machine
整线长度	60米	Total production line length	60m
宽度	3米	Width	3m
总功率	45KW	The total power	45KW
可根据客户实际场地和产量情况进行特殊定制。		Can be customized based on customers actual site space and production needs.	
可定制生产2440*3660大版横向进出设备, 提高产量30%。		Customized production of 2440*3660 large horizontal in and out equipment, increase the output by 30%.	

## 抛光生产线 Polishing Production Line



### 基本信息/Basic Information

抛光线是在传统蒙砂玻璃生产线后进行更高端处理的设备, 可做各种规格参数的电子白板、AG、画框玻璃、显示玻璃等。

1. 配有贴膜机和清洗机、检测台可选。
2. 整线采用平线排列加压喷淋方式, 整版技术参数均匀, 采用程序化控制, 对于不同参数要求的可进行合理有效的调节控制。

The polishing line is the equipment for higher-end treatment after the traditional production line of frosted glass. It can be used for electronic whiteboards, AG, frame glass, display glass, etc. of various specifications.

1. It is equipped with a filming machine, a cleaning machine, and a testing table.
2. The whole line adopts flat line arrangement and pressure spraying method, and the technical parameters of the whole page are uniform. Using programmed control, reasonable and effective adjustment and control can be carried out for different parameter requirements.

### 技术参数/Technical Parameters


名称	抛光生产线
整线长度	30m
宽度	3m
总功率	45KW
可根据客户实际场地和产量情况进行定制。	Can be customized according to the customer's actual site space, actual space and production needs.

## 抛光生产线 Polishing Production Line

1. Horizontal flat production line has much higher quality and output than vertical tank production. The granularity of the entire page is controllable, the gloss is relatively uniform, no tape is used for edge sealing, and no bright edge, which improves the utilization rate of the finished product.
2. No need to stick film in the whole production line, reduce raw material cost. 3-4 people can operate the whole line. The normal production can reach 30-40 seconds/piece.
3. The production line is fully enclosed, is conducive to the collection and discharge of waste gas. One-time molding, no need to pour the glass and clean it again, the liquid medicine and water can be recycled with very little water consumption.
4. Use high effective anti-mildew powder roll coating to reduce paper jams.
5. The company offers technical support, can dispense the required liquid medicine, reducing the cost of raw material purchase. Ordinary jade sand, jade sand without fingerprints, fine frosted sand, fine oil sand, coarse oil sand can be made according to customer needs.
6. This production line adopts automatic upper and lower chip, which greatly increases the output, reduces the labor cost and reduces the risk of manual operation.



## 纳米硅防火玻璃生产线 Nano Fireproof Glass Producing Line

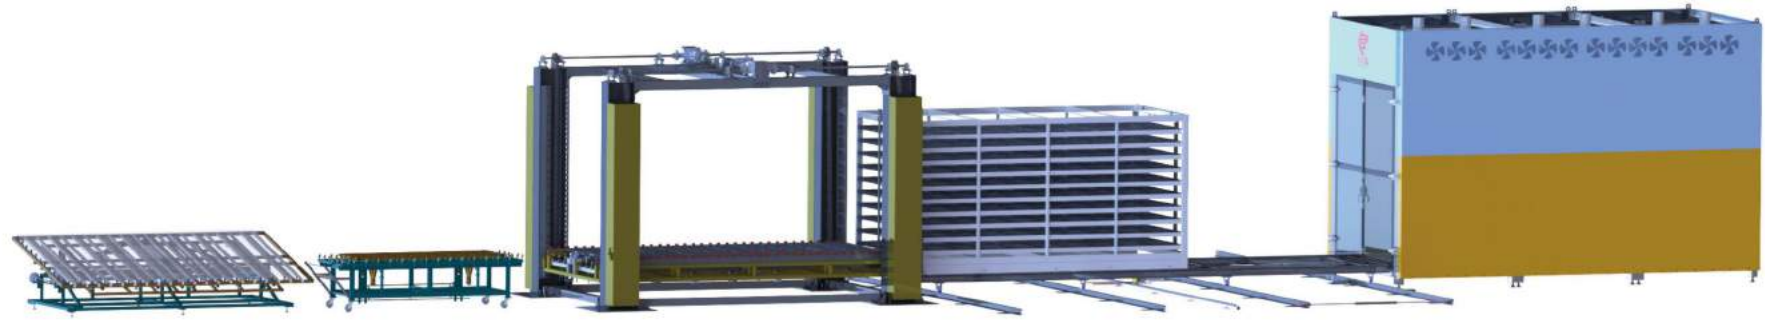

### 基本信息/Basic Information

我公司生产的纳米硅防火玻璃生产线, 在客户原有的切磨洗钢设备的基础上, 可向客户提供灌注设备, 灌浆平台, 移动过渡台, 全自动升降设备和纳米硅烤炉, 我恒昇源公司目前面向世界生产纳米硅防火玻璃, 有着强大的技术支持做后盾, 可对客户做到设备、技术、纳米硅原料、防火材料的全方位服务, 达到买最好的设备, 做最好的玻璃!

科普小贴士:

纳米硅复合防火玻璃是指由两层或多层玻璃原片灌注一层或多层水溶性无机纳米硅复合而成的, 并能够同时满足耐火完整性、耐火隔热性要求的一种防火玻璃。

复合防火玻璃的防火原理是:

当火灾发生时, 向火面玻璃遇高温后很快炸裂, 防火胶夹层开始发泡膨胀, 形成坚硬的不透明防火胶板, 以有效地阻断向火面的火焰向背火面蔓延, 同时也阻断了向火面燃烧产生的热量从向火面向背火面传导。

在火灾中, 纳米硅可始终保持最佳的耐火完整性。其向火面玻璃在遇火后会很快炸裂, 而在独特的防火胶层将伴随温度的升高相继发泡膨胀, 过程中吸收大量火焰热(使玻璃背火面的表面温度平均不超过140°C), 形成不透明防火胶板, 有效阻隔高温、火焰、烟雾及有毒气体, 提供真正安全保护。

Our company, Hengshengyuan, produce nano-silicon fire-resistant glass, with strong technical support, can provide customer with a full range of equipment, technology, and nano-silicon fire-resistant materials. So as to buy the best equipment and do the best glass!

The popular science tips:

Nano-silicon composite fireproof glass is made of two or more layers float glass which is perfused with one or more layer of water-soluble inorganic nona-silicon in between. It can satisfy both fire integrity and insulating requirements at the same time.

The fireproof principle of composite fireproof glass:


When the fire occurs, the glass facing the fire exposes to the high temperature would explode quickly, the fireproof glue interlayer begins to foam and expand to a hard opaque fireproof rubber sheet, therefore to effectively block the fire spreading to the another side of the glass, also block the flame heat go through the glass transferring to the back side.

In a fire, nano silicon can always maintain excellent fire integrity. The glass facing fire explodes quickly after being exposed to fire. The unique internal fire-resistant adhesive layer will foam and expand successively with the increase in temperature, and absorb a large amount of flame heat in the process (maintain the back side glass surface average temperature below 140°C), forming an opaque fireproof rubber sheet, effectively blocking high temperature, flame, smoke and toxic gases, providing real safety protection.

Our company's nano-silicon fire-resistant glass production line can provide filling equipment, grouting platform, mobile transition table, automatic lifting equipment and nano-silicon oven on the basis of the customer's original cutting, grinding and washing steel equipment.

### 技术参数/Technical Parameters

名称	升降台	平台	炉体	Name	Lifting platform	Platform	Furnace
长度	5.7m	8.2m	6.1m	Length	5.7m	8.2m	6.1m
宽度	4m	12m	3.2m	Width	4m	12m	3.2m
高度	4m	3m	4.5m	Height	4m	3m	4.5m
功率	10KW		100KW(单个)	Power	10KW		100KW(each)
备注		3个架子, 架子减少宽度可以减小	可以放3个	Note		3 shelves, shelves reduced width reduced	Can put three stove

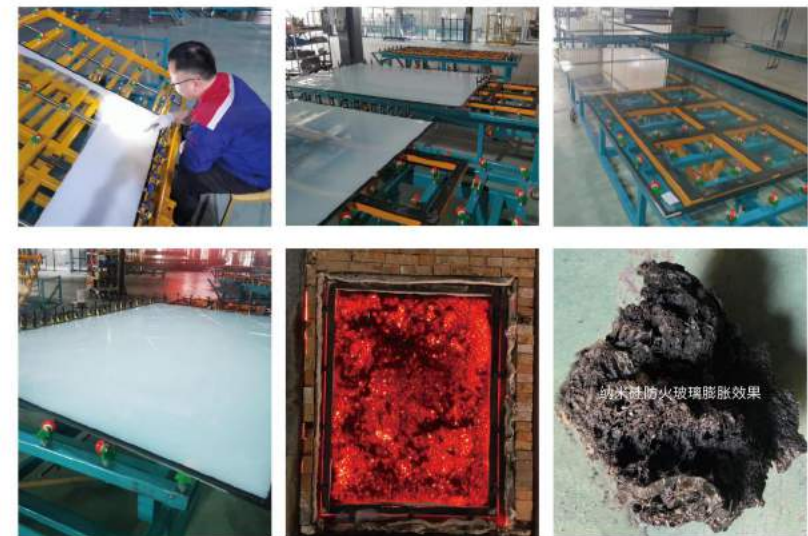

## 纳米硅防火玻璃生产线 Nano Fireproof Glass Producing Line

烧检炉  
Fire Proof Glass Testing Furnace



基本信息/Basic Information


本烧检炉专门用于防火玻璃的烧检,可烧检单片非隔热玻璃、复合防火玻璃、中空玻璃、门窗玻璃等。严格按照国家GB/T 9978.1-2008标准制作,满足自检、第三方检测、官方检测要求;满足国标规定时间、规定温度的平稳升温曲线要求;满足国标初始燃烧及稳定燃烧的气压范围要求;针对不同要求增加外部测温点、排烟除尘系统、数据拷贝、远程APP、上位机等。可使用天然气、液化石油气、柴油等。满足并超过国标要求标准,新增安全点火控制,新增热量回收系统,可节约38%的热能。设备有5种安全保护模式,火焰监测装置等。附:常规900\*1500基本数据

This furnace is designed for fire-proof burning test, can test on single layer non-insulation glass, composite fireproof glass, insulating glass, door and window glass etc. The furnace is produced accordance with national 9978.1-2008 standard strictly to meet the self, third-party and official inspection requirements. It meets the requirements of the national standard for a stable heating curve of the specified time and temperature, meets the requirements of the national standard for the initial combustion and stable combustion air pressure range. With different requirements, it adds external temperature measurement points, smoke and dust removal systems, data copy, remote APP, host computers, etc. It can use natural gas, liquefied petroleum gas, diesel, etc. Exceeding the national standard requirements, with new safety ignition control, and a new heat recovery system can save 38% of heat energy. The equipment has 5 safety protection modes, flame monitoring devices, etc.

Attachment: basic data of conventional 900\*1500

技术参数/Technical Parameters

型号	烧检炉
占地	2.5mx4.5m
功率	8KW
最大烧检尺寸	900mmx1500mm
热量	360J
Model	Fire proof glass testing furnace
Covers an area of	2.5mx4.5m
Power	8KW
Maximum test size	900mmx1500mm
Heat quantity	360J

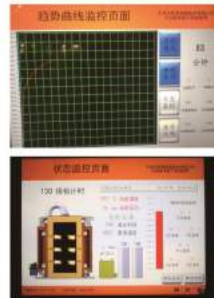

气动吸盘

Pneumatic Vacuum Glass Lifter Sucker



旋转吸盘



两盘旋转



四盘旋转



吸盘2/4通用

技术参数/Technical Parameters

型号	RSY-XZ350	Model	RSY-XZ350
工作重量	260/350KG	Operating weight	260/350KG
工作角度	旋转90°	Work range	Rotating 90°
垂直升降行程	1200mm	Vertical lifting range	1200mm
气动元件	日本SMC	Pneumatic components	SMC(Japan)
吸盘数量	2/4	Sucker cup qty	2/4
吸盘材质	硅胶	Sucker material	Silica gel

功能: 主要适用于立式玻璃深加工设备上下片搬运工序。

Function: Mainly suitable for vertical glass deep processing equipment upper and lower sheet handling process.

