

玻璃上片台C款
Glass-loading Table C Type



本机是一款非常适用的玻璃取片、切割、气浮、掰片一体机，设备可360度旋转、遥控行走可自由移动；上片台自动变频安全可靠，内置大功率空压机，无需再附加气路；气缸壁由进口真空调压开关控制上面才可直接把玻璃放于台面，无需移动设备，更加安全可靠。该机有半自动和全自动两种工作模式，半自动根据需求点动，全自动模式下可一键完成玻璃上片工作。

This machine is suitable for glass loading ,cutting with air-floating . The machine can be rotated 360°by remote-control. The automatic frequency conversion of the loading table is safe , with high-power air compressor inside. It has two modes: automatic and semi-automatic.

技术参数/Technical Parameters

型号	RSY-SPTA/C	Model	RSY-SPTA/C
外观尺寸	2100*3600*800 (mm)	Overall Appearance Size	2100*3600*800 (mm)
最大加工尺寸	2800*3660 (mm)	Maximum processing size	2800*3660 (mm)
最小加工尺寸	1830*2440 (mm)	Minimum processing size	1830*2440 (mm)
适应厚度	3-19mm	Adaptive thickness	3-19mm
功率	7kw	Power	7kw

玻璃专用吊带
Glass belt



底座和防割层实际使用细节图



防割层粘布细节图



瑞士进口织带机



R角线切割钢制底托
终身使用，受力均匀，完美负荷
390*100*14
200*100*14




新式防割层
对吊带、玻璃双向保护
900*100*8
500*100*6

天津市日昇源玻璃技术有限公司从事玻璃行业30年，经过不断改进优化，生产出了中国质量最好、设计最合理的玻璃吊带。本产品采用高强度涤纶丝为承载芯，同时在内层玻璃接触部位添加了两道高新技术材料作为防割层，耐割耐磨，并独创设计了可终生使用的R角全钢垫板底座，产品设计符合力学原理，分散负荷，细节完美。该吊带比同类产品重9公斤，使用寿命可延长2倍，本产品已申请国家专利(专利号:201430200860.0)保护，并由太平洋保险公司承保。

Tianjin Rishengyuan Glass Technology Co., Ltd has engaged in the glass industry more than 30 years. After continuous improvement and optimization, the company has manufactured the best quality and design belts in China. The belts utilize high-intensity polyester tread as the bearing core, and add high-tech materials in the inner glass contact area as the anti-cutting layer. Also, it originally creates the R-angle full-steel plate base which can increase lifetime. This design product conforms to mechanics principle to distract weight with perfect details. We had already applied for national patent protection (Patent No.201430200860.0) and is underwritten by Pacific Insurance Corporation..

新式吊杆 New Type Hanging Bar

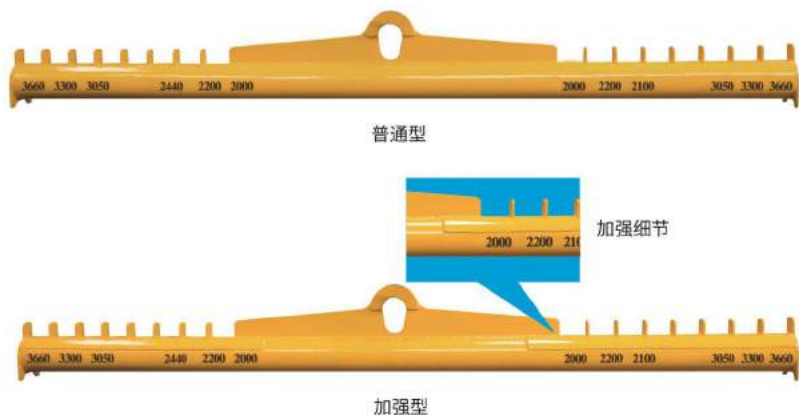

该吊杆集中了其它多款吊杆的优点,根据常规玻璃板面的差异化(如长度3300和3660的玻璃与宽度10CM吊带的兼容性),根据力学原理设计,精密计算出纵向和横向的承载力量,用3D设计出具有完美主义的新式吊杆,该吊杆可适应长度2000mm-3660mm常规版面的玻璃。无缝钢管直径增加至146mm,工业级的而保焊机深层熔透焊接,焊点打磨精细,不会损伤吊带,确保使用的安全性。表面使用环氧漆处理,防锈防腐,防紫外线,附着力强,使用寿命长。在挂带的每个档位有醒目的规格标注,使用更省心。可更具客户要求,特殊定制。

New type Hanging Bar concentrated many advantages of other Hanging Bars. It is designed by 3D according to different sizes of glass that is from 2000mm - 3660mm. The diameter of seamless steel tube is increased to 146mm. It is made by carbon dioxide welder which make the welding fine. The surface of the tool is processed by epoxy paint, rust resistance, corrosion resistance. It could be customized according to customer's requirements.

技术参数/Technical Parameters

型号	RSY-XSDG08	Model	RSY-XSDG08
长度	3200mm	Length	3200mm
档位数量	八档	Number	Eight
直径	146mm	Diameter	146mm
可吊玻璃长度	2000、2200、2400、3050、3300、3600 (mm)	Glass length to lift	2000、2200、2400、3050、3300、3600 (mm)



意大利LC吊夹 LC Glass Clamp

技术参数/Technical Parameters

型号	RSY-YDLDJ1000(橡胶型、软木型)
Model	RSY-YDLDJ1000(Rubber type/Cork type)
尺寸	224*740*654(mm)
Size	224*740*654(mm)
提升重量	20-800kg
Lifting weight	20-800kg
加持厚度	4-19mm
Glass thickness	4-19mm
开口度	44mm
Opening size	44mm
自重	25kg
Self weight	25kg



该吊夹秉承意大利设计理念,精美的做工和稳定的性能使其在国际上具有良好的声誉。压铸铝件保证了作业时需要的强度;压铸铝件与天然橡胶热熔在一起,保证了橡胶与铝件不会剥离;天然橡胶保证了玻璃的亲附着力,永远不会滑落;腿部设计了八个聚氨酯脚轮,外部四个轮方便作业时靠着外围玻璃滑动,内部四个轮确保被夹玻璃沿轮子滑入,不会触碰铝件和橡胶。

The clamp with fine workmanship and stable performance make it has a good reputation in the world. Die-casting aluminum ensures the strength needed for the job; Die-casting aluminum with natural rubber guarantees the rubber and aluminum not stripping; Natural rubber to ensure the affinity of glass adhesion, never slip; Eight polyurethane casters at the bottom of the clamp make the glass slip in easily and will not touch the aluminum or rubber.

全自动鳄鱼吊夹 Full-automatic Glass supporting clamp

该吊夹是在原先半自动吊夹的基础上经过精心改良的升级产品。产品的外观采用特殊工艺处理,整体流畅靓丽。核心的棘轮机构小巧精准,转动灵活,吊夹松开和闭合的过程无需手动辅助,只需随天车的升降完成开闭动作,使用轻松自如,更能保障使用的安全性。

The clamp is designed on the basis of the original semi-automatic glass supporting clamp. It works with overhead crane for opening and closing operation, easy to operate, safe to use.



技术参数/Technical Parameters

型号	RSY-QZDJ5000
Model	RSY-QZDJ5000
提升重量	500kg
Lifting Weight	500kg
夹持厚度	4-19mm
Glass Thickness	4-19mm
自重	17.5kg
Self Weight	17.5kg
外观尺寸	250*260*560 (mm)
Dimensions	250*260*560 (mm)
建议起吊片数	1片
Recommended lifting pieces	1Piece



气浮式除膜机

Air Floating Coating-removing Machine



该机为变频Low-E玻璃除膜机，采用双轨道设计，运行稳定。除膜轮对玻璃的压力可通过气缸气压调节，达到干净彻底的除膜且不会烧伤玻璃。除膜的宽度可通过底部手轮进行精准的调节，全自动时，可根据玻璃版面大小调节限位挡的距离，从而实现机头在此区域左右移动，对于熟练的工人可通过变频器调节进行的速度。半自动时，可人工控制机头的运行，随心所欲的停止或作业。气浮机构使玻璃旋转更加轻松自如。

This one is variable frequency Low-E glass coating removing machine. The pressure for wheel to glass can be adjusted by cylinder in order to remove the coating completely meanwhile to protect the glass from burning. The removal coating width can be precisely adjusted. Under fully-automatic mode, distance of the stop block can be adjusted according to the size of the glass. Under semi-automatic mode, you can manually control the operation. The air float structure makes the glass rotating more easily.

技术参数/Technical Parameters

型号	RSY-CM-QF04	Model	RSY-CM-QF04
外观尺寸	3000*1550*1080 (mm)	Overall appearance	3000*1550*1080 (mm)
运行模式	全自动和半自动	Running mode	Fully-automatic and Semiautomatic
机头运行距离(最大)	2440 (mm)	Running distance (Maximum)	2440 (mm)
功率	1.6kw	Power	1.6kw

双磨头除膜机

Double Head Coating-removing Machine



技术参数/Technical Parameters

型号	Model	RSY-CM-QF04
外观尺寸	Overall appearance	3000*1550*1080 (mm)
运行模式	Running mode	全自动和半自动
机头运行距离(最大)	Running distance (Maximum)	2440 (mm)
功率	Power	2.35kw

该机主要用于对镀膜玻璃周边除去镀膜层以适应做中空玻璃的要求。相邻两边同时除膜，生产效率高，除膜宽度、厚度可调。该机采用双轨道设计，运行稳定；具有半自动、全自动两种模式，生产更高效。

This machine has full, automatic and semi-automatic modes. When it is full, automatic, it can adjust distance of limit stop according to the glass surface, in order to realize the distance of machine for saving time, greatly reducing labor difficulty. When it is semi, automatic, the moving distance can be controlled by the operators. The air float structure makes the glass rotating easily.

万向轮式除膜机

Universal Wheel Coating- Removing Machine

技术参数/Technical Parameters

型号	RSY-CM-WXL03
功率	0.75kw
整体外观	2000*1450 (mm)
Model	RSY-CM-WXL03
Power	0.75kw
Overall appearance	2000*1450 (mm)



该机轻量化设计，设备性能稳定，机头采用气缸式或弹簧式缓冲式结构，人工推动玻璃，结构简洁，除膜效果好，工作台采用聚氨酯万向轮，转向灵活，不划伤玻璃，使用灵活方便。

Lightweight design, stable equipment performance, the head adopts cylinder type or spring type buffer structure, manual push glass, simple structure, good effect of removing film, working table with polyurethane universal wheel, flexible steering, not scratch the glass, flexible and convenient to use.

双手持Low-E除膜机

Offline Low-E Glass Film-removing Machine

技术参数/Technical Parameters

型号	Model	RSY-C200
转速	Rotational speed	660-3000r/(mm)/min
功率	Power	1200w



该除膜机结构简洁、使用灵活、性能稳定、除膜效果好、加工范围广且不损伤玻璃表面。

This machine has simple structure, stable performance and fine film-removing result without damaging the glass surface. It is flexible to operate and widely used.

单手持Low-E除膜机

One-hand Operation Low-E Coating Removing Machine

该除膜机结构简洁，功率强劲，可单手持长时间操作，大大降低工人劳动强度，除膜轮价格低廉易购，其稳定的性能及较高的性价比深受各大中小型Low-E玻璃加工企业喜爱。

The machine can be operated by one hand for a long time. This can reduce the worker labor strength. It is popular with Low-E glass processing enterprises.



L架 L Shape Shelf



天车吊装



叉车装卸



地牛搬运



多个叠放、节约场地、方便运输



贯穿焊接



自动锁紧带

25mm
40mm
50mm

鼎安达牌玻璃存放架,包括L架、A字架、A字架、原片放置、切片机上片架等。L架是集仓储、搬运于一体的多功能玻璃存放架,是存放零散裁片或中空成品玻璃等的首选。架子角度严格控制在90度,则下线的中空玻璃绝对不会产生滑片。该架子既可用地牛、叉车进行平稳移位,也可用行车直接装卸,闲置或回空运输时一摞可叠加10个,节省库存运输空间,提高仓库利用率。DingAnDa Glass Stock rack includes L-shape shelf and raw glass stock rack. L-shape shelf a multi-functional glass stock rack integrating and transport all-in-one. It is the first choice to store fragmented glass or finished glass. Shelf angle strictly controlled at 90 degrees, so it will never be slipped for the hollowed glass. With crown block and forklift truck, it can move glasses with great stability. And also can be directly handling by crane. The shelf can be overlaid one by one to save storage space, transport space and improve utilization rate if warehouse.

常用规格/The Regular Specification

1. 长 1800x 高 1600x 宽 820mm, 玻璃有效存放厚度达 540mm, 小巧灵活, 适合小货车架子背对背运输。
2. 长 1800x 高 1600x 宽 980mm, 玻璃有效存放厚度达 690mm, 适合中型货车运输。
3. 长 1800x 高 1600x 宽 1180mm, 玻璃有效存放厚度达 890mm, 适合大型货车运输。

1. Length 1800*Height 1600*Width 750mm, effective glass storing thickness reaches 540mm, exquisite and agile, suitable for small truck transport shelf back to back.

2. Length 1800*Height 1600*width 950mm, effective glass storing thickness reaches 690mm, suitable for middle truck transport.

3. Length 1800*Height 1600*width 1150mm, effective glass storing thickness reaches 890mm, suitable for big truck transport.

玻璃架子皮子/Glass Shelves Leather

我公司生产的玻璃架子垫皮,采用优质橡胶制作,质地软硬适中,内置加厚钢板。钉孔直径按小孔设计,使燕尾钉被橡胶包裹,避免玻璃磕碰。在制作常规L架时,常规皮子长短适中,免于切割拼接。

Our company produced the glass shelf mat leather with high quality rubber, moderate hardness, built-thick steel plate. Nail hole diameter orifice design, dovetail staples are rubber-coated to prevent glass bump. In the production of conventional L shelf, conventional leather moderate length without cutting stitching.



常用规格/The Regular Specification

40mm*540mm*10mm 40mm*430mm*10mm
40mm*700mm*10mm 40mm*900mm*10mm
40mm*440mm*10mm

L架速压杆 L Rack Fixed Bar



L架分层倒片杆



L架速压杆

L架速压杆:
避免玻璃在车间搬运过程中发生倾倒。可快速安装、拆卸,省去传统绳索捆绑时间,提高效率。

L架分层倒片杆:
专为玻璃深加工企业玻璃倒片找片、不同规格玻璃同一架子分层摆放使用。此杆方便、快捷、实用,使用安全,能充分利用架子,节约占地空间。

L rack fixed rod
Avoiding the glass slip during moving. Installing and Disassembly more quickly and effective.

L frame layered rewinding rod
It is specially designed for glass deep processing enterprises to rewind and find pieces of glass, and different specifications of glass are placed in layers on the same shelf. This rod is convenient, fast, practical, safe to use, can make full use of the shelf, and save space.

玻璃精品架 High Quality Glass Shelf

本产品广泛用在高端玻璃、中空玻璃配对等放置要求较高的场所,它能保证玻璃单片放置不被划伤。对于中空玻璃配对时可精准取放,达到节约人力、时间及场地的目的。该架子具有玻璃固定装置,避免玻璃在推行过程当中滑落,结构采用分体式,方便拆卸安装,可极大降低运输成本。

This product is widely used in high-end glass, hollow glass pairing, and other places with a strict requirement on glass placing. It can ensure that single piece of glass not hurt when placing. For hollow glass pairing, it can take and put glass accurately to achieve the goal of saving manpower & time & space. The shelf has a device for fixing glass to avoid glass slide down when moving. It uses separated structure, easy to disassembly and installation, can greatly reduce the cost of transportation.



技术参数/Technical Parameters

型号 Model	RSY-JPJZ-84
外观尺寸 Overall Appearance Size	1500*1800*1200 (mm)
架子重量 Weight	230kg
放置玻璃数量 Number of glass	84 pcs
玻璃厚度 Glass thickness	8mm
承载重量 Capacity	1.5T

AL型玻璃原片放置架

AL Type Float Glass Rack



可摆放数十包规格相同的原片玻璃，码放规范整齐，节约场地。
For same sizes of glass, this rack can storage dozens of packages to save space.

A字架

A Shape Rack



仓储A架



运输A架

A字架分为仓储架和运输架两种。
仓储A架:对于放置不同规格版面的玻璃,较为适用。该A架通过专业设计,角度合理,在使用过程中,即使只剩下单侧玻璃,也能安全放置。如需放置更多,可加装底部延伸接头,便可达到放置数十包玻璃的要求。
运输A架:采用国标材料,工业级二保焊机三次熔透焊接。在关键受力点,加装钢板焊接,满足长途运输的安全需要。

A- shape Rack including storage rack and transport rack .
Storage A shape Rack: They are suitable for storage different sizes of glass. If need to storage more packages of glass, can add extensions at the bottom of the rack.
Transport A shape Rack: This rack is made by international standard material with carbon dioxide welder. Make reinforce on some main parts for safety reasons.



移动仓储架

Glass Storage System



优点/Advantage

适用于各型玻璃深加工企业玻璃原片的存取。
Mainly used for float glass storage in glass factory.

用途/Application

移动仓储架可以把玻璃集中管理,遥控运行,有手动、电动两种模式。取片方便,运行平稳。可帮助企业节约用地,可根据客户需求特殊定制,最大可达几十组。
Glass storage system is controlled by motor, when power off can operated manually. Help to save space and manage the glass easily.



技术参数/Technical Parameters

移动仓储架规格	(1) 2440x1830型 (2) 2440x3660型 特殊尺寸可根据用户需求定制	Glass storage system Specification	(1) 2440mm*1830mm (2) 2440mm*3660mm We can custom-made special size of glass shelf according by customer requirement
最大放置玻璃尺寸	2440*3660mm	Maximun size of place the glass	2440*3660mm
玻璃架数量	10组 (可根据客户需求定制)	Glass stands No.	10set



特殊定制玻璃放置架 Customized Glass Rack

我公司实力雄厚,有专业的设计团队,可根据客户构想和要求,为客户量身打造。
Our company strength is abundant,has a professional team,we can according to customer's idea and requirements,tailored for the customer.



可拆卸连体A架
Detachable conjoined A-frame



可拆卸上片AL架
Removable upper sheet AL frame



车间用连体A架
One-piece A frame for workshop



集装箱海运架
Container shipping rack




可叠放L架
Stackable L-frame



双层木箱仓储架
Double-layer wooden box storage rack



移动连体A字架
Moving conjoined A-frame

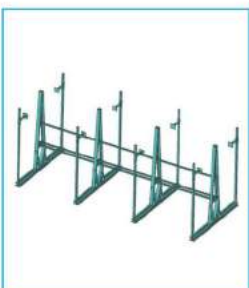

组合式A字架
Combined a-frame



抽屉式仓储架
Drawer type storage rack

机械维修工具 Mechanical Maintenance Tool Cart

此款机械车是天津日昇源公司与易尔拓工具(上海)有限公司强强联手为钢化厂设备维修完美打造的一款优化整合管理工具。易尔拓品牌源于欧洲,服务中国,产品质量上乘,在行业中有极好的口碑和赞誉。该工具车由丰富维修经验的高级资深技师根据维修需要所高度整合的一款产品,它囊括了钢化厂机器设备维修中的所有工具。优质全面的工具和双层钢化板设计的工具车有效地提升了工作效率,每个产品都有独特的模具定位,设计一目了然避免产品丢失,让您再也不用为工具的缺失而烦心。易尔拓产品全国联保,一次购买,终身质保;质量问题,终身免费更换。

This tool car is TianjinRishengyuan Glass Technology Co.,Ltd and Shanghai YATO Company building of two the centralized management tool of toughened glass factory use tools together. YATO band from Europe,Service China,good quality,excellent reputation and praise in the industry.The tool car maintenance by the rich experienced senior technician according to the maintenance needs of a highly integrated product that encompasses glass factory equipment maintenance of all tools.Quality comprehensive tools and design of double steel tool cart effectively enhance the work efficiency,each product has a separate mold positioning,designed to avoid product loss at a glance,so you no longer have to worry about missing the tool.One purchase,lifetime warranty and the quality and lifetime fee replacement.



玻璃打孔工具车 Glass Drilling Tool Car

该工具向包含了玻璃打孔所需要的全套工具,甚至人性化的放置了围裙、雨靴等,使你一车在手,工具不再缺失。

The toolkit contains a full set of tools,even humanized placed apron,boots,etc.and so on a makes you rest easy.

清胶工具 Glue Cleaning Tools



用途/Application

该机是一款具有高效率的清胶工具，主要用于夹胶玻璃生产线中溢胶清理。现有普通型和风冷型两种，其中风冷型可持续加热，方便快捷，简单实用。

The machine is high-efficient glue removing tool, mainly used in glass laminated production line to clean overflow flue. There are 'standard' and 'air-cooled' two types. Both types are easy to use. The air-cooled style has fans on the top, ventilation and heat dissipation, and can be used continuously.

技术参数/Technical Parameters

名称	风冷清胶工具	Name	Air-cooled Type Glue Cleaning Tool
功率	100-250W	Power	100-250W
重量	600g	Weight	600g
输入电压	AC220V	Input voltage	AC220V
本体长度	270mm	Machine Length	270mm
刀片温度	50-500°C	Blade temperature	50-500°C



青岛鼎安达玻璃科技有限公司 Qingdao Dinganda Glass Technology Co., Ltd

公司隶属于天津市鼎安达玻璃有限公司，地处美丽的海滨城市——青岛。公司主要经营玻璃原片、玻璃深加工成品、玻璃机械和特种玻璃等产品的国际出口业务。在天津鼎安达玻璃有限公司强大后盾支持下，我们希望面向世界推广销售中国优质的玻璃和玻璃机械产品！

同时我们希望将青岛鼎安达公司打造成一家专业的进出口服务提供商，整合物流，货物报关清关，国内外贸易商资源，优化进出口渠道，凭借我公司丰富的外贸人才储备和人脉资源，立足青岛，面向世界，提供专业的进出口代理服务。

青岛鼎安达玻璃有限公司，将以优质的产品，更高的效率，更好的服务，更有竞争力的价格，给予我们的用户更好的合作体验！真诚期待与您携手合作！

The company belongs to Tianjin Dinganda Glass Co., Ltd., locates in the beautiful coastal city - Qingdao. The company's main business is exporting on float glass, deep-processed glass product, glass machinery, glass production related accessory and special glass products. With great back support of Tianjin Dinganda Glass Co., Ltd., we introduce China's high-quality glass and glass machinery products to the world!

At the meantime, Qingdao Dinganda is working towards to a professional import and export service provider, integrate logistics, cargo declaration and clearance, resources of domestic and foreign traders, optimize import and export channels, relying on our company's foreign trade reserve and network resources to establish a foothold Qingdao, facing the world, provides professional import and export agency services.

Qingdao Dinganda Glass Co., Ltd. will provide high-quality products, high efficiency, great service, and more competitive price to you! Sincerely look forward to working with you.



日昇源合作伙伴

我公司拥有多名经验丰富的机械设计工程师和电气工程师,具有强大的产品设计能力和丰富的实践经验,可按照客户需求,定制非标产品。您的梦想由我们的设计团队帮您实现!



展会风采

